



RED LABEL LIPO DOCIER

GENERAL SPECIFICATION

- 10 — 20C CONTINUOUS DISCHARGE
 - 20-40C PULSE
 - 3.0C CHARGE RATE

— www.revolectrix.com —



REVOLECTRIX RED LABEL 20C


FRESH LIPO


The REVOLECTRIX range of RED label battery packs have been carefully selected and cells matched for your application. Every battery pack is assembled on the same day as your shipment thus ensuring you receive the freshest LiPO battery packs. Look out for the date code on the battery label.

Extreme Performance

At REVOLECTRIX we have hand selected the highest performing batteries for your application. Since we co-developed LiPO in 1999, REVOLECTRIX has been the true to specification supplier of LiPO that you can trust and respect.

This data sheet for RED label batteries will show you the fullest data on all the packs available for your selection.

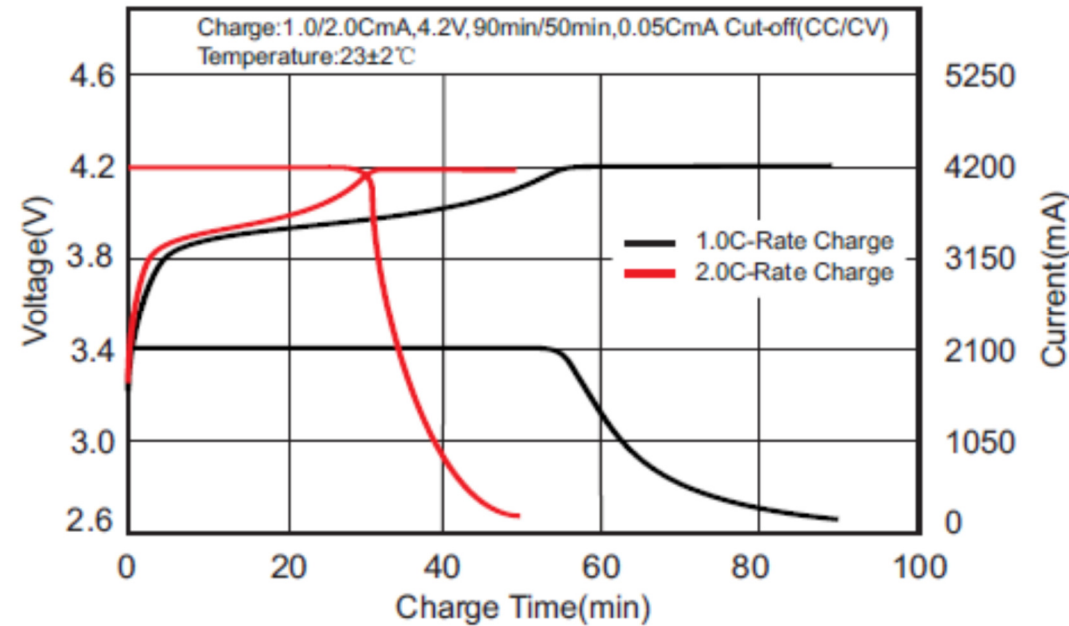




RED 2100 2S 7.4V

Size: 14 * 34 * 96 mm
Weight: 105 grams


Discharge Continuous: 20C
Discharge Pulse: 40C
Max Charge: 3C



RED 2100 3S 11.1V

Size: 21 * 34 * 96 mm
Weight: 155 grams

Discharge Continuous: 20C
Discharge Pulse: 40C
Max Charge: 3C



RED 2100 4S 14.8V

Size: 27 * 34 * 96 mm
Weight: 210 grams

Discharge Continuous: 20C
Discharge Pulse: 40C
Max Charge: 3C



RED LABEL 7700 8C

RED 7700 8C 2S 7.4V

Dimensions (mm): 12 * 67 * 160 mm
Weight: 300 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 3S 11.1V

Dimensions (mm): 18 * 67 * 160 mm
Weight: 450 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 4S 14.8V

Dimensions (mm): 24 * 67 * 160 mm
Weight: 600 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 5S 18.5V

Dimensions (mm): 31 * 67 * 160 mm
Weight: 750 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 6S 22.2V


Dimensions (mm): 37 * 67 * 160 mm
Weight: 900 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 7S 25.9V

Dimensions (mm): 43 * 67 * 160 mm
Weight: 1080 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

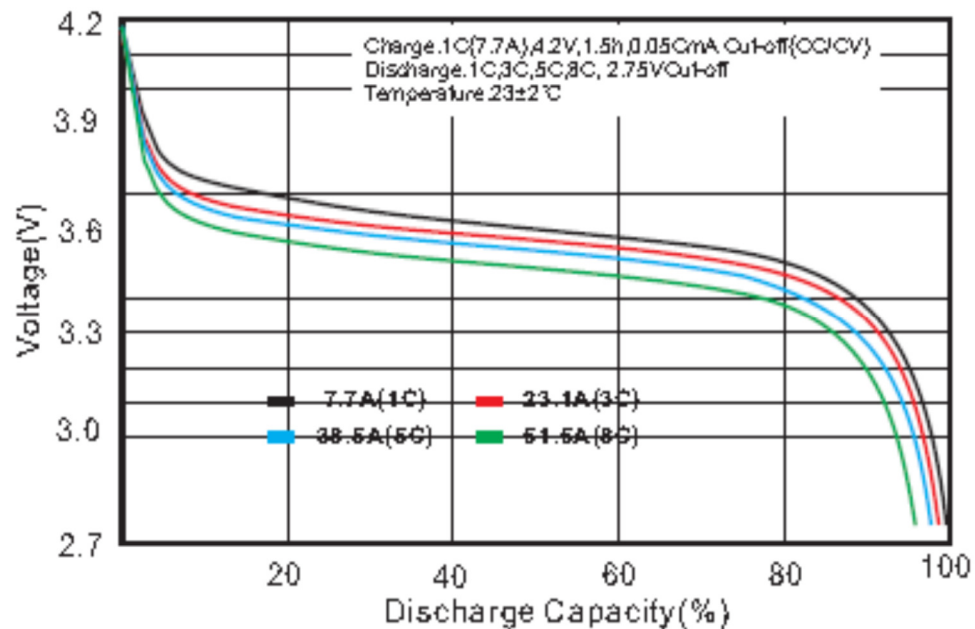



RED LABEL 10000 8C

RED 10000 8C 2S 7.4V

Dimensions (mm): 22 x 48 x 158
Weight: 390 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 3S 11.1V

Dimensions (mm): 33 x 48 x 158
Weight: 580 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 4S 14.8V

Dimensions (mm): 45 x 48 x 158
Weight: 780 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 5S 18.5V

Dimensions (mm): 57 x 48 x 158
Weight: 980 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 6S 22.2V


Dimensions (mm): 67 x 48 x 158
Weight: 1160 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 7S 25.9V

Dimensions (mm): 78 x 48 x 158
Weight: 1350 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

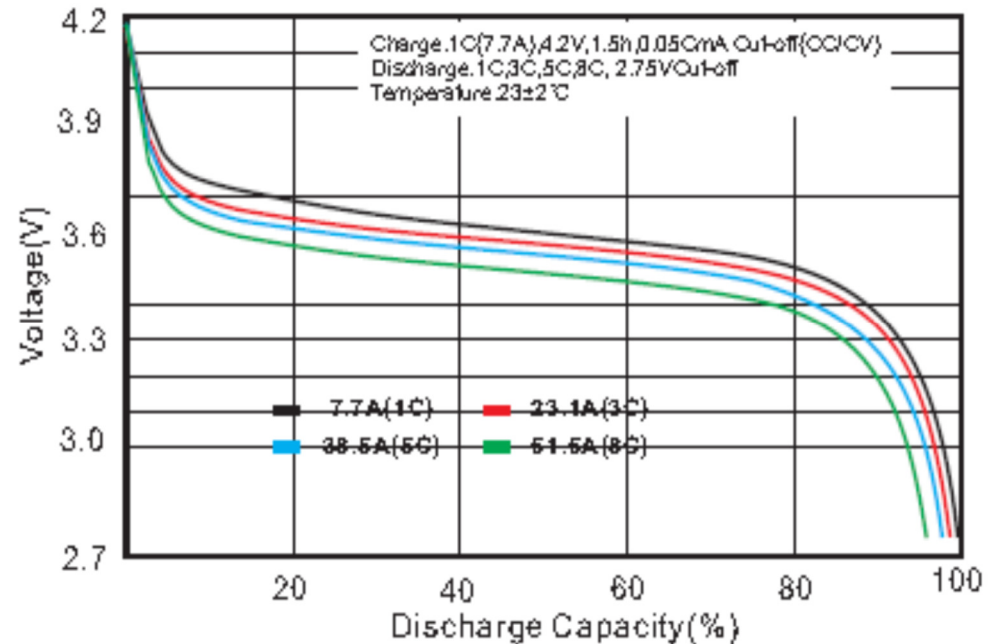



Headquarters
1090 Lower Delta Rd #03-01
Singapore

energy@leoindustries.com

— www.revolectrix.com —