



# TURBOCHARGE RC CAR PACKS DOCIER

## **GENERAL SPECIFICATION**

- 40—60C CONTINUOUS DISCHARGE
  - 120C PULSE
  - 8.0—10C CHARGE RATE

— [www.revolectrix.com](http://www.revolectrix.com) —



## REVOLECTRIX TURBOCHARGE



### FRESH LIPO

The REVOLECTRIX range of TURBO CHARGE DIAMOND label battery packs have been carefully selected and cells matched for your application. Every battery pack is assembled on the same day as your shipment thus ensuring you receive the freshest LiPO battery packs. Look out for the date code on the battery label.

### Extreme Performance

At REVOLECTRIX we have hand selected the highest performing batteries for your application. Since we co-developed LiPO in 1999, REVOLECTRIX has been the true to specification supplier of LiPO that you can trust and respect.

This data sheet for TURBOCHARGE DIAMOND label batteries will show you the fullest data on all the packs available for your selection.

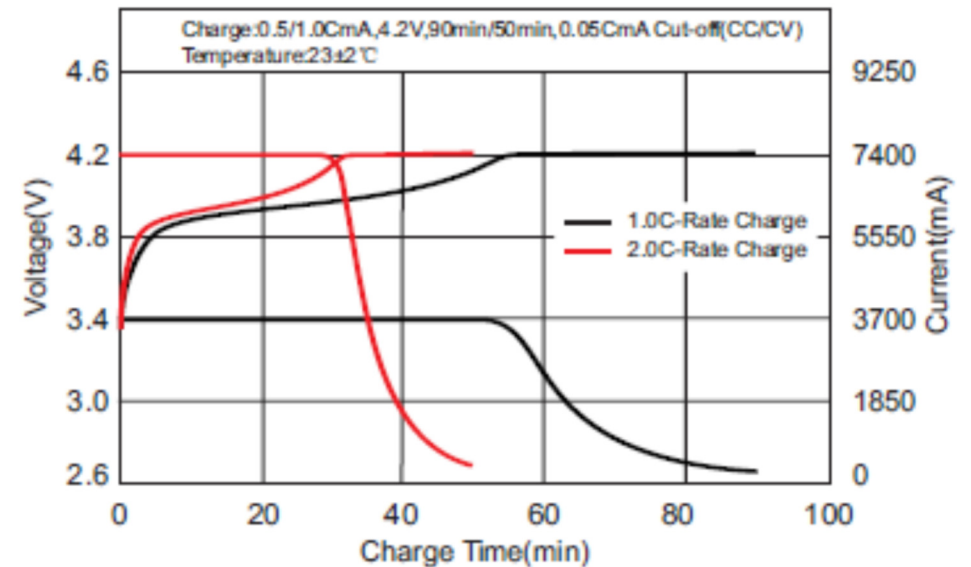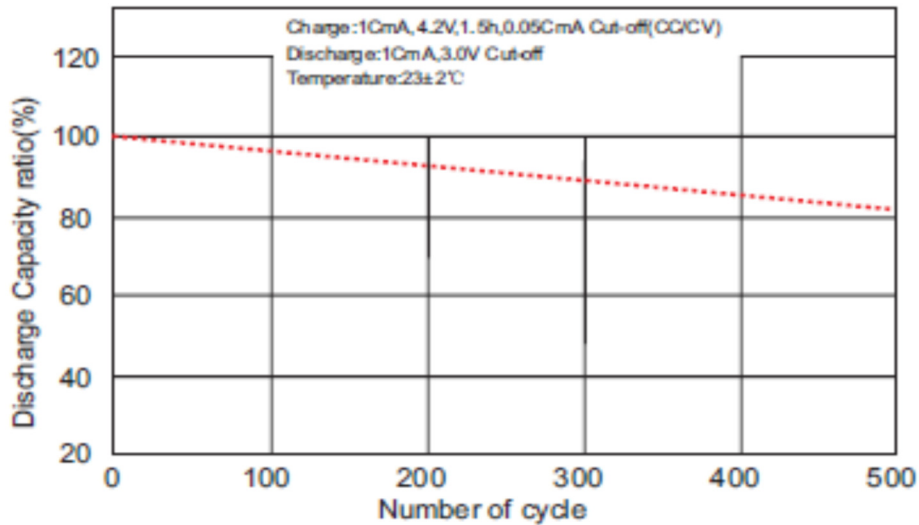



# TURBOCHARGE 1/8 SCALE PACKS

## DIAMOND 6000 60C 2S 7.4V HARDPACK

Dimensions (mm): 139x47x24.8

Weight: 309 grams

**Discharge Continuous: 60C**

**Discharge Pulse: 120C**

**Max Charge: 8C**



## DIAMOND 4000 40C 2S 7.4V HARDPACK

Size: 15 \* 44 \* 130 mm

Weight: 184 grams

**Discharge Continuous: 60C**





# TURBOCHARGE 1/10 SCALE PACKS

## DIAMOND 4100 60C 7.4V 65C SHORTY

Dimensions (mm): 96x47x24.8  
Weight: 211 grams

**Discharge Continuous: 65C**  
**Discharge Pulse: 120C**  
**Max Charge: 8C**



## DIAMOND 6500 65C 2S 7.4V HARDPACK

Dimensions (mm): 139x47x24.8  
Weight: 309 grams  
Designed for 1:10 on-road and off-road vehicles

**Discharge Continuous: 66C**  
**Discharge Pulse: 120C**  
**Max Charge: 8C**

## DIAMOND 5200 60C 7.4V SADDLEPACK

Dimensions (mm): 69.5x47x25.1 (x2)  
Weight: 298 grams

**Discharge Continuous: 60C**  
**Discharge Pulse: 120C**  
**Max Charge: 8C**  
**Connector: 4mm sockets**





# TURBOCHARGE 1/12 SCALE PACKS

**DIAMOND 5500 60C 1S 3.7V NUGGET**

Size: 93 \* 47 \* 18.5 mm

Weight: 157 grams

**Discharge Continuous: 60C**

**Discharge Pulse: 120C**

**Max Charge: 8C**

---



**Singapore** • 1200 Depot Rd #07-18 • Singapore 109675 • Ph (65) 6272 1818 • [energy@leoindustries.com](mailto:energy@leoindustries.com)  
**USA** • 3520 Sugarloaf Parkway, Suite F-03-121 • Urbana, Maryland 21704 • Ph (301) 798 2770 • [sales@revolectrix.com](mailto:sales@revolectrix.com)

— [www.revolectrix.com](http://www.revolectrix.com) —