



MULTIROTOR SPECIALTY PACKS DOCIER

GENERAL SPECIFICATION

- 10—20C CONTINUOUS DISCHARGE

— www.revolectrix.com —



REVOLECTRIX TURBOCHARGE

FRESH LIPO

The REVOLLECTRIX range of MULTIROTOR battery packs have been carefully selected and cells matched for your application. Every battery pack is assembled on the same day as your shipment thus ensuring you receive the freshest LiPO battery packs. Look out for the date code on the battery label.

Extreme Performance

At REVOLLECTRIX we have hand selected the highest performing batteries for your application. Since we co-developed LiPO in 1999, REVOLLECTRIX has been the true to specification supplier of LiPO that you can trust and respect.

This data sheet for MULTIROTOR batteries will show you the fullest data on all the packs available for your selection.



BLACK LABEL 6250 30C

BLACK 6250 30C 2S 7.4V

Size: 17 x 46 x 148 mm
Weight: 270 grams

Discharge Continuous: 30C
Discharge Pulse: 60C
Max Charge: 2C

BLACK 6250 30C 3S 11.1V

Size: 17 x 46 x 148 mm
Weight: 400 grams

Discharge Continuous: 30C
Discharge Pulse: 60C
Max Charge: 2C

BLACK 6250 30C 6S 22.2V

Size: 17 x 46 x 148 mm
Weight: 800 grams

Discharge Continuous: 30C
Discharge Pulse: 60C
Max Charge: 2C

BLACK 6250 30C 7S 25.9V

Size: 17 x 46 x 148 mm
Weight: 930 grams

Discharge Continuous: 30C
Discharge Pulse: 60C
Max Charge: 2C

BLACK 6250 30C 4S 14.8V


Size: 17 x 46 x 148 mm
Weight: 540 grams

Discharge Continuous: 30C
Discharge Pulse: 60C
Max Charge: 2C

BLACK 6250 30C 5S 18.5V

Size: 17 x 46 x 148 mm
Weight: 670 grams

Discharge Continuous: 30C
Discharge Pulse: 60C
Max Charge: 2C

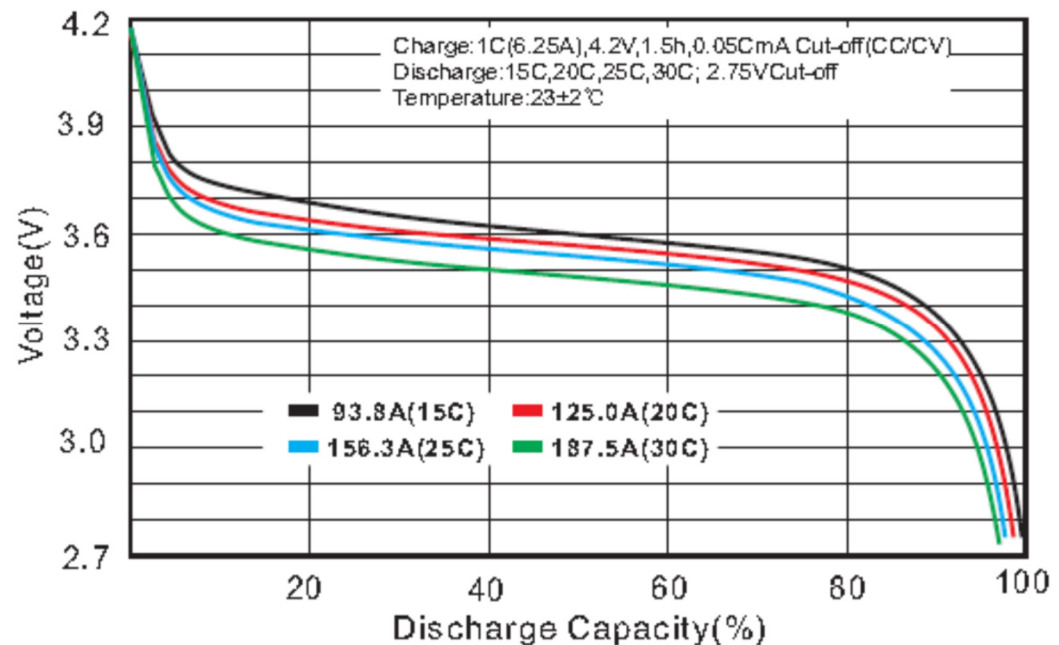



RED LABEL 7700 8C

RED 7700 8C 2S 7.4V

Dimensions (mm): 12 * 67 * 160 mm
Weight: 300 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 3S 11.1V

Dimensions (mm): 18 * 67 * 160 mm
Weight: 450 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 6S 22.2V

Dimensions (mm): 37 * 67 * 160 mm
Weight: 900 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 7S 25.9V

Dimensions (mm): 43 * 67 * 160 mm
Weight: 1080 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 4S 14.8V


Dimensions (mm): 24 * 67 * 160 mm
Weight: 600 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 7700 8C 5S 18.5V

Dimensions (mm): 31 * 67 * 160 mm
Weight: 750 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

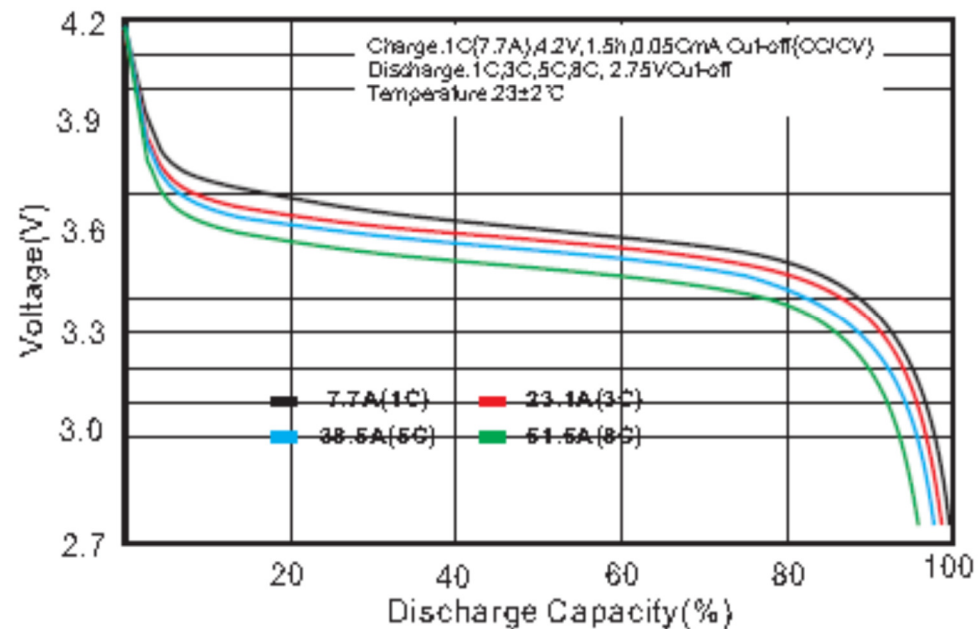



BLACK LABEL 9000 25C

BLACK 9000 25C 2S 7.4V

Dimensions (mm): 12 x 67 x 220

Weight: 425 grams

Discharge Continuous: 25C

Discharge Pulse: 50C

Max Charge: 2C

BLACK 9000 25C 3S 11.1V

Dimensions (mm): 18 x 67 x 220

Weight: 640 grams

Discharge Continuous: 25C

Discharge Pulse: 50C

Max Charge: 2C

BLACK 9000 25C 6S 22.2V

Dimensions (mm): 37 x 67 x 220

Weight: 1270 grams

Discharge Continuous: 25C

Discharge Pulse: 50C

Max Charge: 2C

BLACK 9000 25C 7S 25.9V

Dimensions (mm): 44 x 67 x 220

Weight: 1300 grams

Discharge Continuous: 25C

Discharge Pulse: 50C

Max Charge: 2C

BLACK 9000 25C 4S 14.8V

Dimensions (mm): 25 x 67 x 220

Weight: 850 grams

Discharge Continuous: 25C

Discharge Pulse: 50C

Max Charge: 2C

BLACK 9000 25C 5S 18.5V


Dimensions (mm): 31 x 67 x 220

Weight: 1060 grams

Discharge Continuous: 25C

Discharge Pulse: 50C

Max Charge: 2C

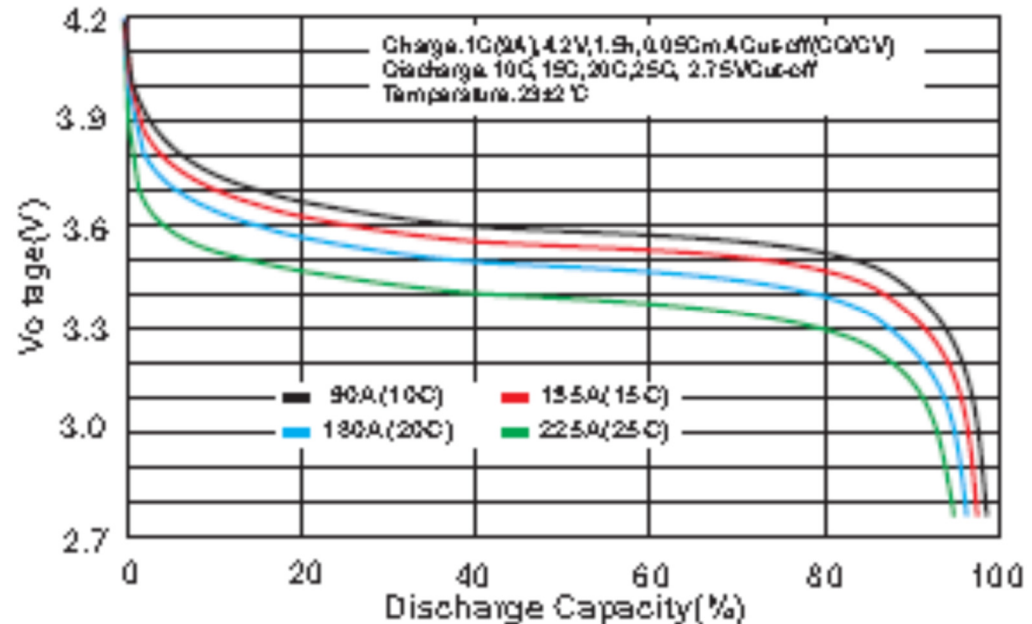



RED LABEL 10000 8C

RED 10000 8C 2S 7.4V

Dimensions (mm): 22 x 48 x 158
Weight: 390 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 3S 11.1V

Dimensions (mm): 33 x 48 x 158
Weight: 580 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 6S 22.2V

Dimensions (mm): 67 x 48 x 158
Weight: 1160 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 7S 25.9V

Dimensions (mm): 78 x 48 x 158
Weight: 1350 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 4S 14.8V


Dimensions (mm): 45 x 48 x 158
Weight: 780 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

RED 10000 8C 5S 18.5V

Dimensions (mm): 57 x 48 x 158
Weight: 980 grams

Discharge Continuous: 8C
Discharge Pulse: 16C
Max Charge: 2C

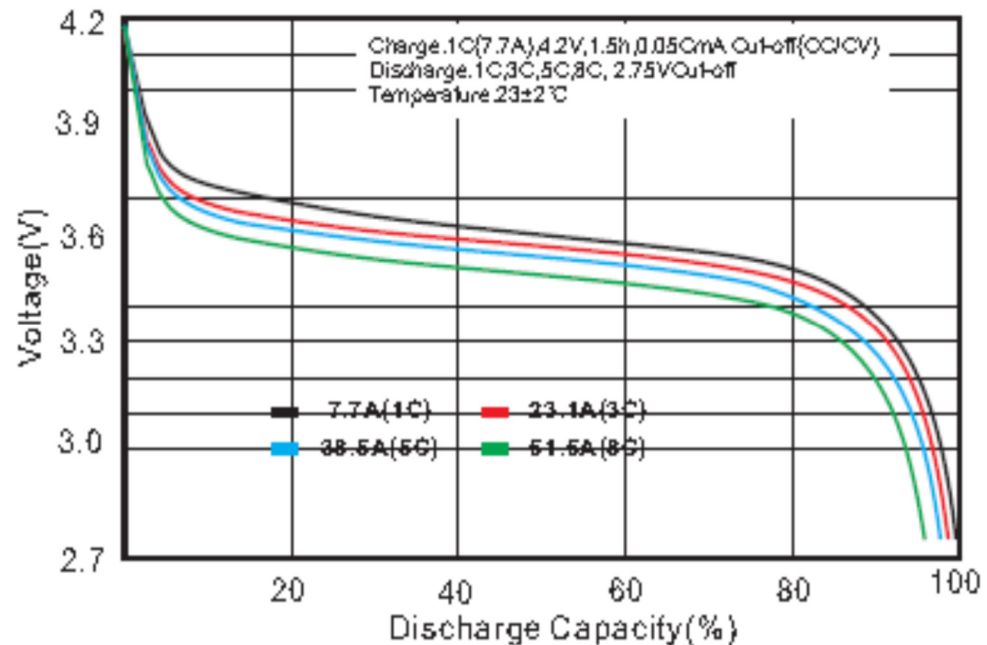



Singapore • 1090 Lower Delta Rd #03-01 • Singapore • Ph (65) 6272 1818 • energy@leoindustries.com
USA • 3520 Sugarloaf Parkway, Suite F-03-121 • Urbana, Maryland 21704 • Ph (301) 798 2770 • sales@revolectrix.com

— www.revolectrix.com —